


THMT C6266, 3000b/c - Centre Lathe - (660)



Distance between centres:	3000mm
Spindle bore:	Ø105mm
Swing over bed:	Ø660mm
Spindle head joining style:	D1-8
Spindle reducing bush taper:	Ø113mm (1:20)/ MT5
Spindle speed grade:	16
Spindle speed range:	25~1600rpm
Large screw size:	Ø40mm x 2T.P.I. or Ø40mm x 12mm
Inch thread range & kind:	7/16~80 T.P.I. (54 kinds)
Metric thread range & kind:	0.45~120mm (54 kinds)
Diameter pitch range & kind:	7/8~160DP (42 kinds)
Module range & kind:	0.25 ~ 60MP (46 kinds)
Metric spindle longitudinal feed per revolution:	0.044~1.48mm/rev (25 kinds)
Inch spindle longitudinal feed per revolution:	0.0016498~0.05497" /rev (25 kinds)
Metric spindle cross feed per revolution:	0.022~0.74mm/rev (25 kinds)
Inch spindle cross feed per revolution:	0.0008326~0.02774" /rev (25 kinds)
Travel of tailstock sleeve:	235mm
Diameter of tailstock sleeve:	Ø 90mm
Inside taper of tailstock sleeve:	MT5
Power of main motor:	7.5kW (10PH)
Power of cooling pump:	0.09kW (1/8HP)

Standard Accessories:
3 Jaw chuck Ø 315mm
4 Jaw chuck Ø 400mm
Faceplate Ø 445mm
8x Foot mounts
Travelling steady
Fixed steady

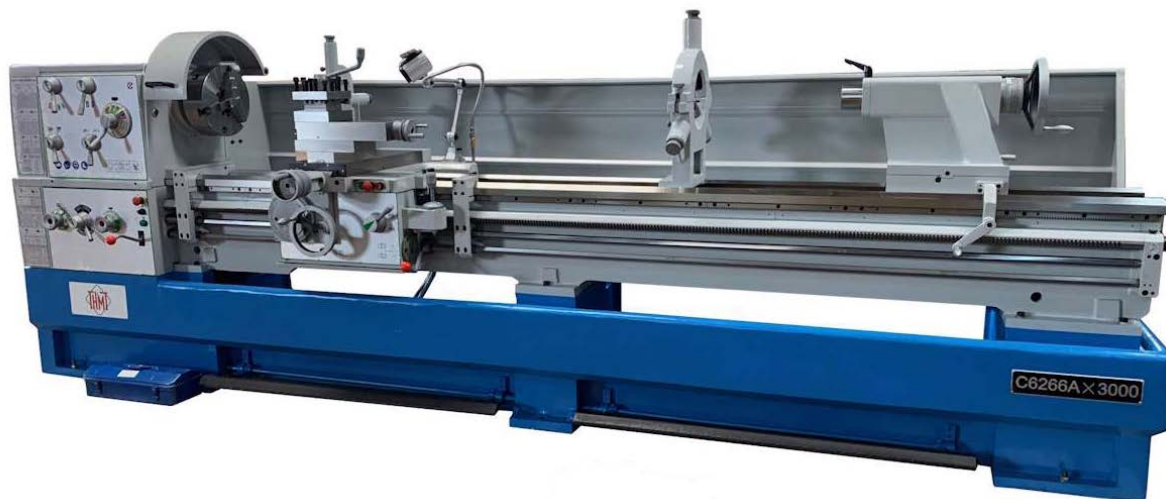

Centre Lathe

Turning Centre