


THMT CJK6132 Flat Bed CNC Turning Centre (5487)

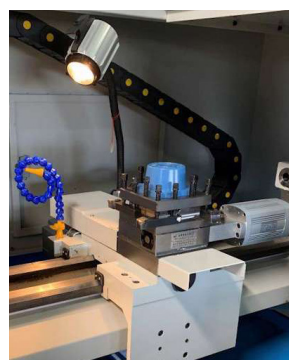

Specifications:

Distance between centers: 1000mm

Max swing Ø over bed: 320mm

Max swing Ø over saddle: 150mm

Spindle taper: MT5

Max Ø of spindle bore: 38mm

Spindle speed range: 100-2500rpm

Travel of crossslide: 160mm

Feed motor torque (X/Z): 6NM/12NM

X rapid traverse: 5m/min

Z rapid traverse: 10/min

Electric toolpost: 4 station

Taper of tailstock: MT3

Barel travel of tailstock: 160mm

Power of main motor: 2.2kW

Dimensions: 2300 x 1100 x 1650 (LxWxH)

Weight: 950kg

Optional Accessories:

6 -Station Electric Toolpost

Pneumatic Chuck

Hydraulic Chuck

Standard Accessories:

160mm 3 -Jaw Chuck and Tool Post Wrench

Electrical Toolpost (4 Station)

Cooling System

Automatic Lubricating system

Working Lamp

Siemens 808D CNC Control

Induction Hardened Bed-Way

The THMT logo, consisting of the letters 'THMT' in a bold, red, sans-serif font, set against a white background with a black outline.

CNC Flatbed Turning Centre